

Accessories



Vehicle Technology

Jockey Wheels

Product Features

- Designed for stability and easy operation.
- Variety of models and wheel types.
- Zinc plated (H/D) or Galvanised (Std.) Steel Construction.
- Profiled wheel fork for added strength (H/D only).
- Thrust Bearing for smooth and easy operation (H/D only).
- Retractable wheel (item 7 & 8 only).

AL-KO Jockey Wheels are designed for stability and ease of operation. They come in a variety of models, all manufactured to the same high standard.

Two different types are available - Heavy Duty (H/D) or Standard (Std.). Heavy Duty have a range of hard, pneumatic or our unique softwheel tyres. The standard range of Jockey Wheels have rubber, pneumatic or softwheel tyres.

Heavy Duty Jockey Wheels are of steel construction and have a profiled fork for added strength. They are zinc plated to BS1706 to ensure a long rust free life.

Standard Jockey Wheels are of steel construction, have a pressed steel fork and are galvanised.


Each AL-KO Jockey Wheel can be supplied with the appropriate cast or pressed steel clamp.

Our range of Prop Stands includes 35mm or 48mm tube diameters. Also in the range is a 48mm retractable Prop Stand.

Strict Quality Control and Quality Assurance procedures at our UK and European factories ensure that all AL-KO Jockey Wheels are manufactured to the highest standards.

Key to Pictures

- | | |
|-----------------------------|---------------------------------|
| 1) Pneumatic Wheel H/D | 8) Retractable Jockey Wheel |
| 2) Soft Wheel H/D 3 Seg | 9) Prop Stand 48mm |
| 3) Steel Wheel H/D | 10) Retractable Prop Stand 48mm |
| 4) Rubber Wheel Std | 11) Cast Clamp |
| 5) Soft Wheel Std 5 Seg | 12) Pressed Steel Clamp |
| 6) Pneumatic Wheel Std | |
| 7) Retractable Jockey Wheel | |

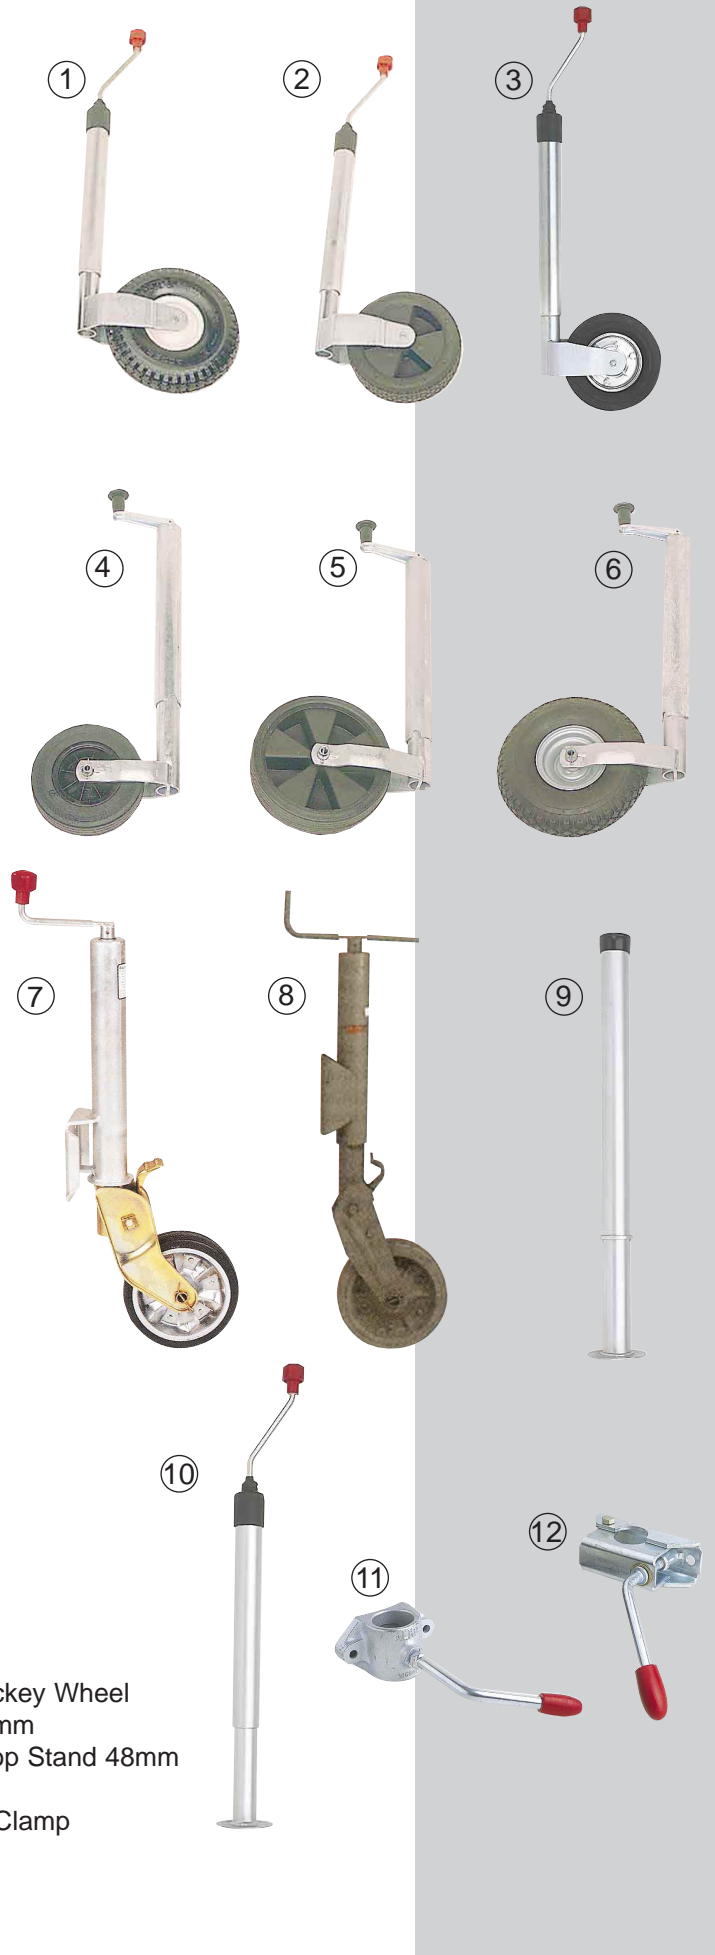

Jockey Wheels



Vehicle Technology

Specification and Technical Data

Part No.	Description	Net Weight Kg	Static Capacity Kg	Tube Dia. (mm)	Total Height Without Handle (mm)	Replacement Spare Wheel Part No.
285053	Pneumatic Wheel H/D	6.5	170	48	437	376553
285052	Soft Wheel H/D 3 Seg.	5.5	250	48	437	20617120
285350	Steel Wheel H/D	6.5	250	48	437	376967
205678	Rubber Wheel Std.	5	150	48	500	376551
205736	Soft Wheel Std. 5 Seg.	5	250	48	530	206171
205809	Pneumatic Wheel Std.	5	200	48	540	354317
242061	Retractable Steel	10	500	60	730 (Range 245)	580202
205754	Retractable	15	800	73.5	830 (Range 300)	206110

Part No.	Description	Tube Dia. (mm)	Height (mm)
377028	Prop Stand c/w Collar	35	700
285520	Prop Stand	35	700
377733	Prop Stand	35	1000
295228	Prop Stand c/w Collar	48	700
285062	Prop Stand	48	700
211353	Retractable Prop Stand	48	710 (Fully Extended) 420 (Closed Position)

Part No.	Type	Comments
205317	Pressed Steel Clamp 35mm	For use with AL-KO Prop Stands Only
205318	Pressed Steel Clamp 48mm	For use with AL-KO Jockey Wheels and Prop Stands
295191	Cast Clamp 48mm	For use with AL-KO Jockey Wheels and Prop Stands

Your Choice for all Applications

AL-KO Kober Limited, South Warwickshire Business Park, Kineton Road, Southam, Warwickshire, CV47 OAL

Tel: (01926) 818500 Fax: (01926) 818562

www.al-ko.co.uk mail@al-ko.co.uk